


**iFLOW**  
 H<sub>2</sub>O METRIX


# SMART ULTRASONIC WATER METER

add iFlow **H<sub>2</sub>O**  
**Metrix** system  
to Read  
Remotely



## APPLICATION

Ultrasonic water meter **QALCOSONIC W1** is designed for accurate measurement of water consumption in households, apartment buildings and small commercial premises, where low flow sensitivity is important.

- Static flow measurement – no moving parts, no wear and tear
- Very high metering accuracy
- Eliminates measuring deviations caused by sand, suspended particles or air pockets
- Long-term measurement stability and reliability
- 9 digits, multi-line LCD. Total volume and instantaneous flow rate indication at the same time

## TECHNICAL FEATURES

- Sensitive in low flows – starting flow as low as 0.01 gpm
- Maintenance free device, battery lifetime > 16 years
- Installation in any position
- No straight piperun needed
- No measurement of air
- IP68 protection class
- Bi-directional flow measurement
- Durable composite body
- Measurement units: Gal-GPM, ft<sup>3</sup>-ft<sup>3</sup>/h
- Strainer and check valve (optional)

## APPROVALS

- NSF/ANSI/CAN 61
- FCC part 15C
- OIML R49 compliant
- NTEP Approved



## AMI READY

- Integrated LoRa WAN communication, US902-928 MHz band
- Integrated NB-IoT (upcoming)
- NFC interface
- Total volume
- Forward volume
- Reverse volume
- Maximum flow rate value and date
- Minimum flow rate value and date
- Operating time without an error
- Operating time
- Error code
- Water temperature indication


## DATA LOGGER - HISTORY VALUES

- Hourly, daily, monthly values of the measured parameters are stored in internal memory

## LCD INDICATIONS AND ALARM

MULTIPLE ALARMS AND EVENTS, INCLUDING:

- Flow direction indication
- Battery level indication
- Leakage
- Burst
- Backflow
- Empty pipe
- Radio communication
- Warning indication
- Low temperature warning

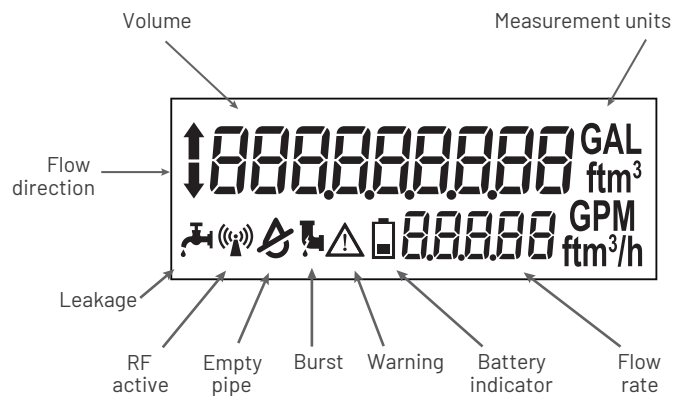

## TECHNICAL DATA:

Flow sensor sizes	3/4" x 7 1/2" / 1" x 10 3/4" / 1 1/2" x 12 5/8" *
Flow measurement	New meter measurement accuracy is within the following limits: ± 1.5% over the normal flow range ± 3.0% from the extended low flow range to the minimum flow value
Measured Fluid Temperature Range	33... 194° F (0.1 ... +90° C) According to AWWA C715-18, measurement accuracy is maintained at water temperatures up to 80° F (+27° C).
Storage Temperature (empty flow sensor)	-13 ...158° F (- 25...70° C)
Protection class [IP]	IP68
Installation	Indoors or outdoors
Battery	3.6-volt lithium thionyl chloride; battery is not replaceable; 16-year battery life

## SPECIFICATIONS:

QALCOSONIC W1 meter size	$\frac{3}{4}$ " short	1"	1 $\frac{1}{2}$ " *
Size Designation x Lay Length	$\frac{3}{4}$ " x 7 $\frac{1}{2}$ "	1" x 10 $\frac{3}{4}$ "	1 $\frac{1}{2}$ " x 12 $\frac{5}{8}$ "
Operating Range	0.15 ... 30 gpm	0.3 ... 50 gpm	0.6 ... 100 gpm
Extended Low-Flow Rate	0.044 gpm	0.11 gpm	0.275 gpm
Maximum Continuous Operation (Safe Maximum Operating Capacity)	30 gpm	50 gpm	100 gpm
Pressure Loss	3.6 psi at 15 gpm	2.3 psi at 25 gpm	2.3 psi at 50 gpm
Max Ambient Humidity	0...100% condensing		
Maximum Operating Pressure of Meter Housing	232 psi		
Register Type	Straight reading, permanently sealed two line LCD; digits are 0.33 in. high		
Register Display	<ul style="list-style-type: none"> <li>• Consumption (US gallons of cubic feet)</li> <li>• Flow rate (US gallons per minute or cubic feet per hour)</li> <li>• Alarms and error codes (if any)</li> <li>• Flow direction indication</li> <li>• Radio active</li> </ul>		
Register Capacity	<ul style="list-style-type: none"> <li>• 999.999.999 gallons</li> <li>• 999.999.999 cubic feet</li> </ul>		
Display Units Available	<ul style="list-style-type: none"> <li>• Gallons or Cubic Feet</li> </ul>		



✉ [www.iflowinc.com](http://www.iflowinc.com)

☎ (949) 313-7075 or 1-888-651-1130

📍 2109 S. Wright St, Santa Ana, CA 92705

